


# Wheel washing system MobyDick Flex 800 MC

Art. no. MDK-A300-800MC

Two mobile, hot-dip galvanized, water-bearing wash units with splash guard walls, pump sump tanks, recycling tanks with scraper conveyors, pump technology, solid concrete ramps, and a control system.

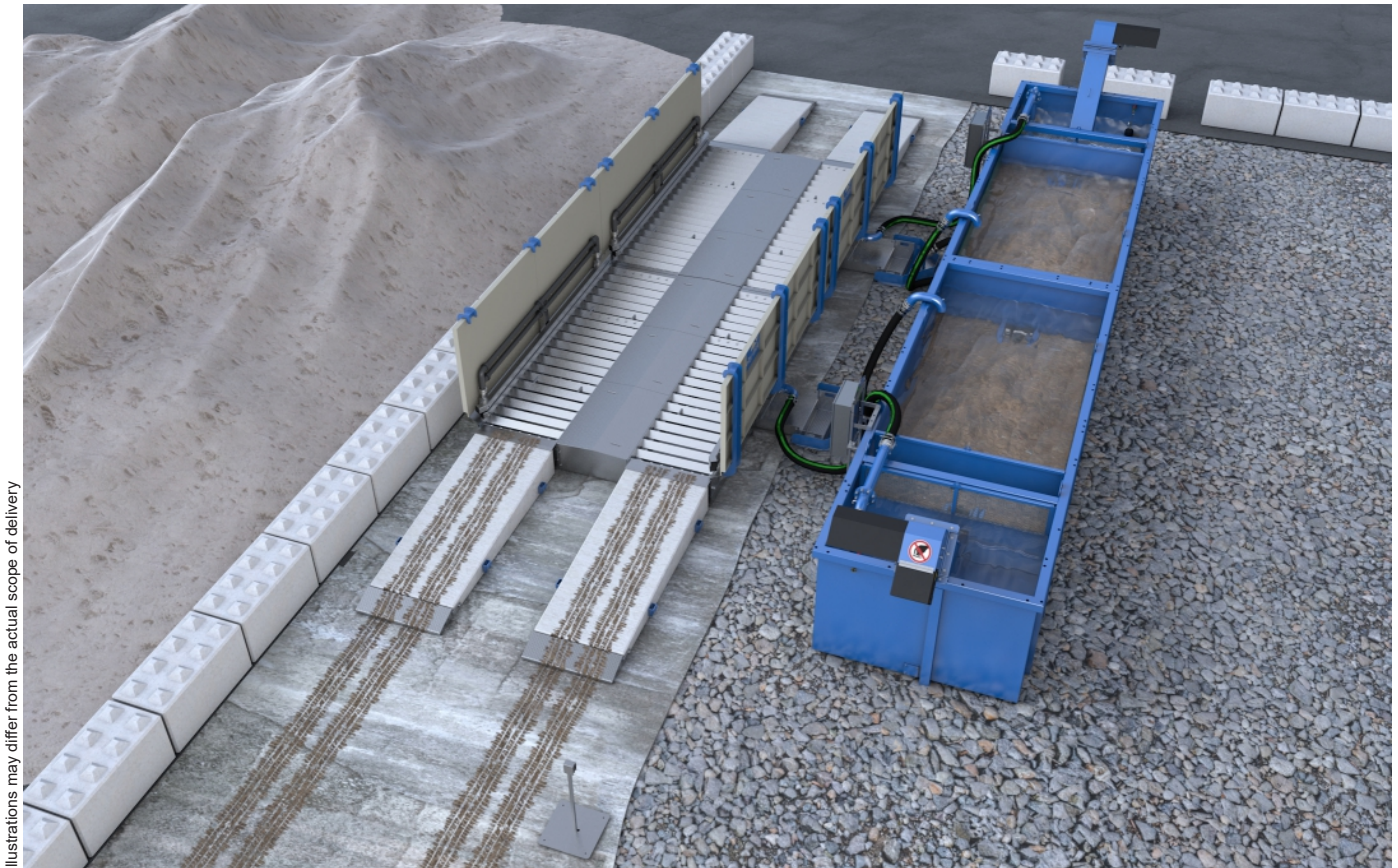

Illustrations may differ from the actual scope of delivery


## Flex 800 MC – A model from our Standard Line

Flex – The modular concept for the construction industry


The wheel washing systems of the Flex series were developed by our engineers specifically for the needs of the construction industry. The basic unit of the modular concept consists of a robust 158 inch long wash unit and a recycling tank. It can be combined with a scraper conveyor, a mobility package or a second basic unit to form eight different wheel washing systems that are 158 or 316 inch in length. All models can be installed quickly and impress thousands of operators around the world.

### Function description

A truck drives slowly into the wheel washing system. The vehicle identification sensor automatically triggers the washing process. The specially coordinated nozzle system, consisting of a large number of bottom and side nozzles, then ensures the intensive cleaning of all tires and the entire chassis in one wheel rotation. Higher vehicle areas such as windows and rear-view mirrors are not washed, so as to leave the driver's field of vision clear. The kneading effect created by the angle profiles gives the tire treads additional cleaning. The duration of the washing process can be freely selected using the timer relay in the control cabinet, in accordance with the relevant operating conditions. The waste water runs via the return channel from the wash unit to the side recycling tank. This is where the washed-off solids settle out. The water is fed under a surge wall and over the partition wall with sieve insert into the pump chamber. There it is reused by the robust MobyPump immersion pump for further spraying. An excavator or suction vehicle removes the settled solids from the recycling tank.

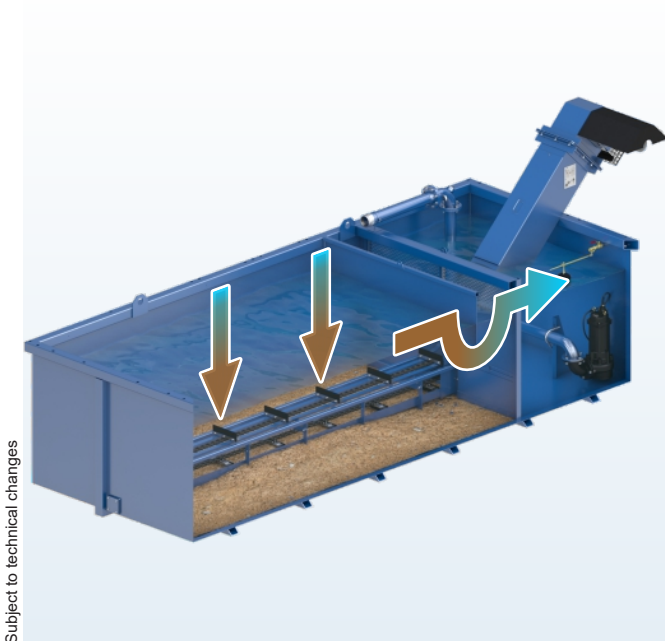

Subject to technical changes

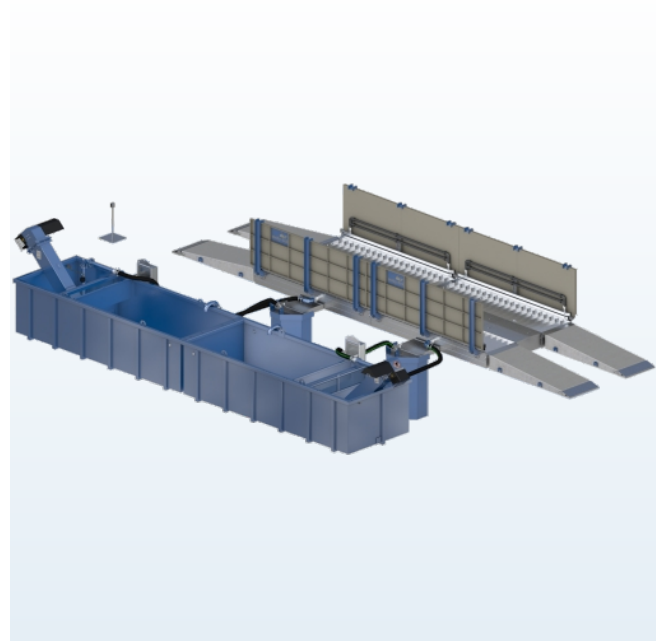

### Water recycling

In all MobyDick wheel washing systems the water is circulated in a closed circuit. Water treatment is via sedimentation in the recycling tank. Sedimentation can be accelerated by adding a flocculant. Settled solids are continuously conveyed out of the recycling tank by the scraper conveyor.

### Specifications (Dimensions see layout)

• Drive-through length	316 in
• Drive-through width	110 in
• Maximum axle load	16.5 tons
• Splash guard wall height	54 in
• Nozzles	2×130 pcs
• Nozzle Ø	0.28 in
• Recycling tank volume	2×4760 gal
• Maximum pumping capacity	4×660 gal/min
• Electrical connection values	32 HP/60 A
• Sound emission	< 75 dB
• Weight (ready to ship)	25.9 tons

### Scope of supply

- 2×1 hot-dip galvanized, water-bearing wash unit
- Splash guard wall per side
- 2×1 double side nozzle bars per side
- 2×1 hot-dip galvanized return channel for the waste water
- 2×1 control cabinet with connection cable
- Optical sensor to trigger the washing process
- 2×1 MobyPump immersion pump
- 2×1 MobyPump macerating pump
- Pump bracket and piping
- 2×1 recycling tank 20 C with scraper conveyor
- 2×1 pump sump tank
- 4 ramps to the wash units
- Scraper conveyor access protection

### Areas of application

The Flex 800 MC model can wash up to 150 moderately soiled trucks per day.

Typical operation sites – depending on the number of trucks and degree of soiling – are

- Construction sites
- Gravel plants and quarries
- Concrete mixing plants
- Recycling facilities
- Landfills
- Port facilities
- Food industry
- Cleaning and disinfection
- Other areas on request