



# Recycling tank 50C

Art. no. —

Painted steel recycling tank with scraper conveyor.

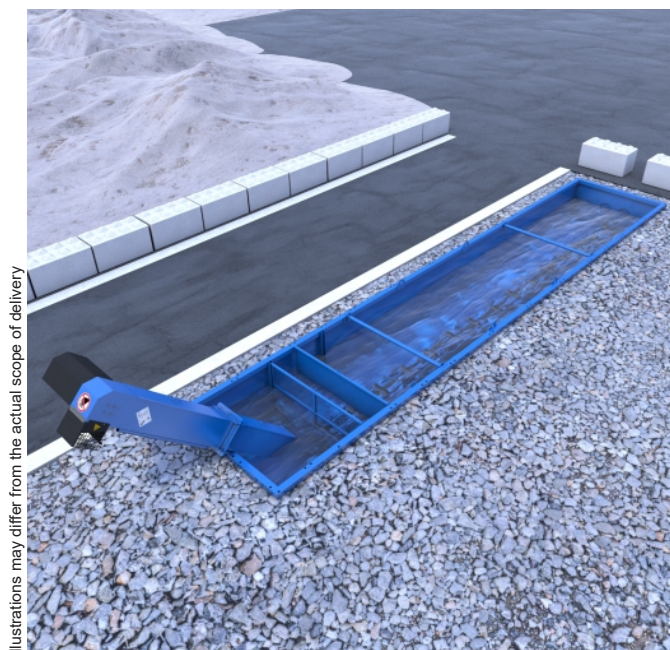

Illustrations may differ from the actual scope of delivery

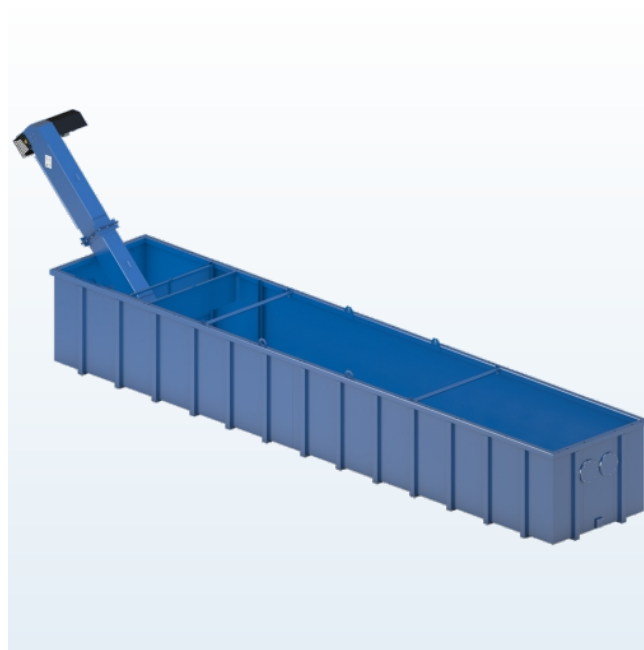

## Function

The washed-off solids settle out in the recycling tank. The integrated scraper conveyor conveys settled sludge from the recycling tank. The water is fed via the overflow wall with sieve insert into the pump chamber. It is recommended to use the MobyDos Compact flocculant dosing system (optional).

## Technical description

Recycling tank consisting of a solid steel structure with profile frame (5 mm) and steel plates. Surface treatment by chemical cleaning, primer 60 µ and top coat 60 µ Traffic blue (RAL 5017). Flow-optimised placement of the overflow partition with sieve insert. Integrated scraper conveyor consisting of gear motor, drive and deflection shafts, conveyor chain with dirt scrapers and guide rails. Two drain covers for easy emptying of the tank. The tank construction allows it to sustain all the forces generated by a passing loaded lorry even when empty.

## Specifications

• Dimensions (H×W×L)	355×220×1350 cm
• Dimensions recycling tank (H×W×L)	165×220×1160 cm
• Ejection height (above recycling tank) *	147 cm
• Electrical connection values	0.37 kW/2 A
• Weight (ready to ship) *	5000 kg
• Material	Steel
• Colour	Traffic blue (RAL 5017)

\* in accordance with "Technical description"

## General scope of supply

- Recycling tank
- Scraper conveyor
- Overflow partition with sieve insert
- Scraper conveyor access protection
- Additional components dependent on recycling tank design, for example: baffle, level control, rim elevations, tank connections