
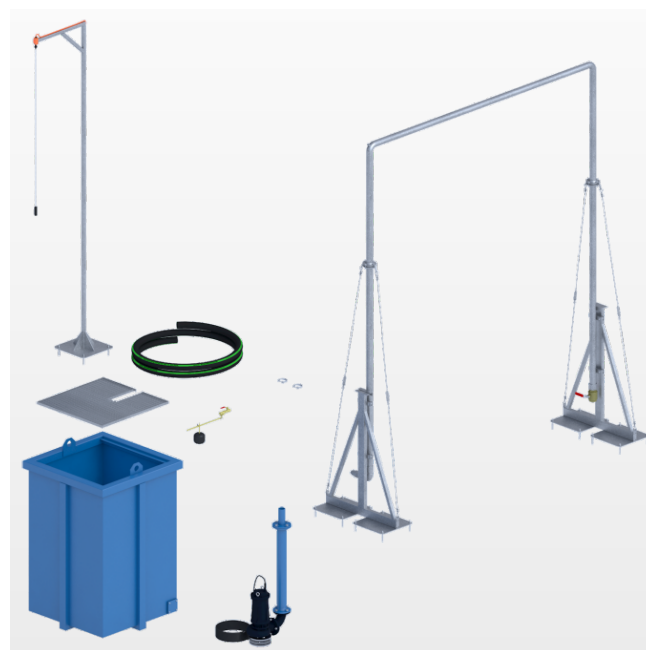


# Cargo moistening system with fresh water

Option Code: [-CAMO-FRESH-]

Rinse rack for cargo moistening with fresh water.

Illustrations may differ from the actual scope of delivery

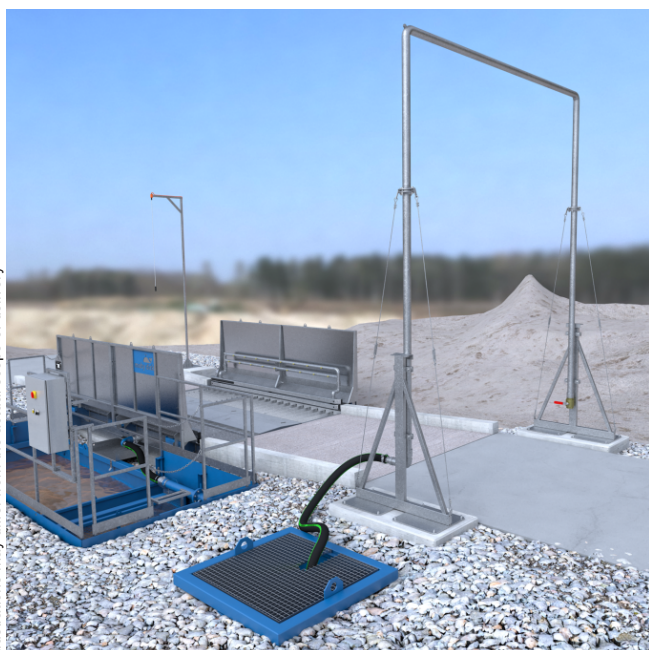

## Function

The rinse rack is used to humidify dry, dusty loads. The washing water is also washed off the vehicle. The water used for this comes from the extra fresh water tank.

The spray duration of the rinse rack is set in the control cabinet. It is triggered individually for each vehicle by the driver.

## Technical description

Hot-dip galvanised rinse rack with fixed nozzles for moistening the load with water from a separate fresh water tank (deployable volume 4 m<sup>3</sup>) made of steel, painted in Traffic blue (RAL 5017). Submersible pump MobyPump 20 with pump support and float valve. Pressurised water lines (max. 4 metres).

Extension in the control cabinet. Boom with pull switch to trigger individual cargo moistening.

## Specifications

### Rinse rack with fixed nozzles

- Material Hot-dip galvanised steel
- Passage height 450 cm
- Dimension (H×W) 458×365 cm

### Fresh water tank

- Dimension (H×W×L) 190×130×130 cm
- Volume 4 m<sup>3</sup>
- Material Steel
- Colour Traffic blue (RAL 5017)

## General scope of supply

- Rinse rack with fixed nozzles
- Fresh water tank
- Submersible pump MobyPump 20 and float valve
- Drain valve 2"
- Hose lines, hose clips
- Fittings
- Boom with pull switch
- Extension in the control cabinet