


# Cargo moistening system with recycling water

Option Code: [-CAMO-RECY-]

Rinse rack for cargo moistening with recycling water.

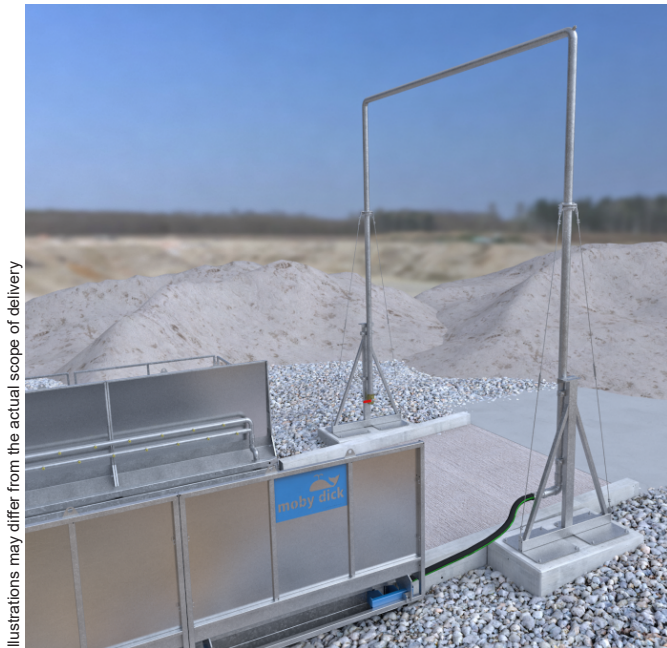

Illustrations may differ from the actual scope of delivery



## Function

The rinse rack is used to humidify dry, dusty loads. The recycling water used for this comes from the recycling tank of the wheel washing system.

## Technical description

Hot-dip galvanized rinse rack with fixed nozzles for moistening the load with recycling water from the recycling tank of the wheel washing system. Pressurized water line for connection to one of the washing elements.

The triggering is analogous to that of the wheel washing system via the vehicle identification sensor. No additional pump is required.

## Specifications

### Rinse rack with fixed nozzles

• Material	Hot-dip galvanized steel
• Passage height	14.75 ft
• Dimension (H×W)	15×12 ft
• Nozzle Ø	1.2 in

## General scope of supply

- Rinse rack with fixed nozzles
- Drain valve 2"
- Hose lines, hose clips
- Fittings
- Mounting material